
MODELING OF LOGISTICS PROCESSES

ACTIVITY #2

Building of element flow logic

dr hab. Daniel Kaszubowski, prof. PG

Department of Transportation Engineering



Co-funded by
the European Union

Co-funded by the European Union. Views and opinions expressed are however those of the author or authors only and do not necessarily reflect those of the European Union or the Foundation for the Development of the Education System. Neither the European Union nor the entity providing the grant can be held responsible for them.



1. Objective and new skills

The aim of the task is to master the ability to create the logic of the flow of elements in the model using built-in object control functions and using labels assigned to flow elements. The information obtained is necessary to create advanced rules for controlling the flow of elements, necessary in further classes.

New skills
Using basic functions to control the flow of elements in model objects
Basic ability to create and configure flow elements
Ability to create labels assigned to flow elements
Assigning values to created labels
Fundamentals of flow control using label value based functions

2. Basic principles of creating flow logic

2.1. Send to Port

Basic information about the flow structure is provided by the list of input, output and central ports of each object (Fig. 1). The rules of the flow of elements between objects are established by means of commands controlling output ports. Information about which output port is to be selected is contained in the *Output section* of each element and the *Send to Port command* (Fig. 2). Its details will be discussed in the following subchapters.

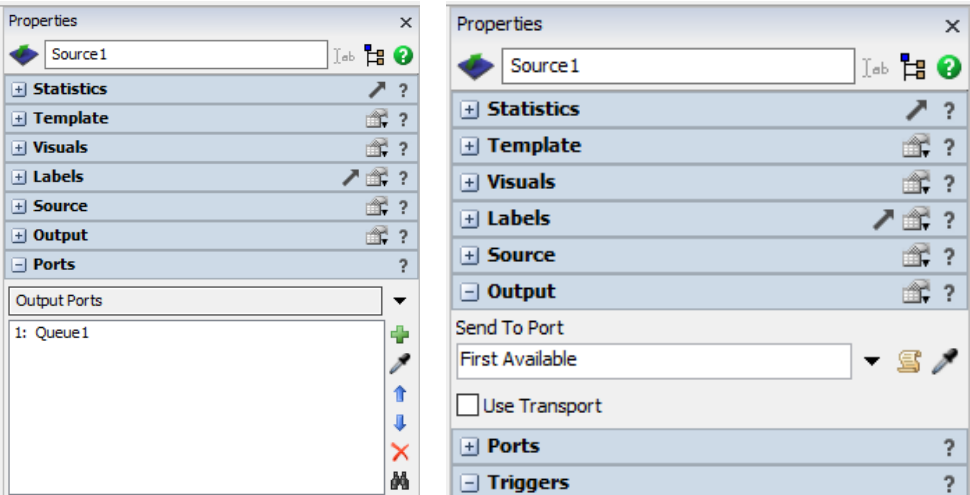


Fig. 1 Port list Fig. 2 Output port selection control

By default, *Send to Port* is set to *First Available*, which means that the item will be sent to the first available output port. You can enter the port number here (from *Output Ports*) to which the flow elements are to be sent. Entering "0" is equivalent to the *First Available option*.

2.1.1. Random option

The *Random* → *Random Port* option is one of the simplest ways to split the input stream. The effect will be a random selection of the output port by subsequent elements (Fig. 3).

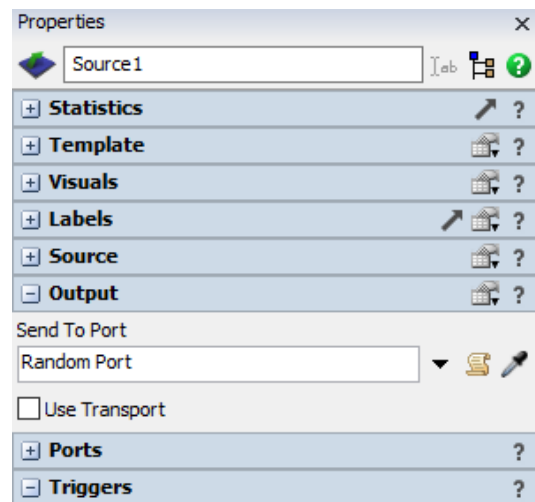


Fig. 3 Random selection of output port

2.1.2. Option By Percentage

After selecting the *Random* → *By Percentage* option in *Send to Port*, a window appears allowing you to divide the output stream by percentage to individual ports – in this case three (Fig. 4).

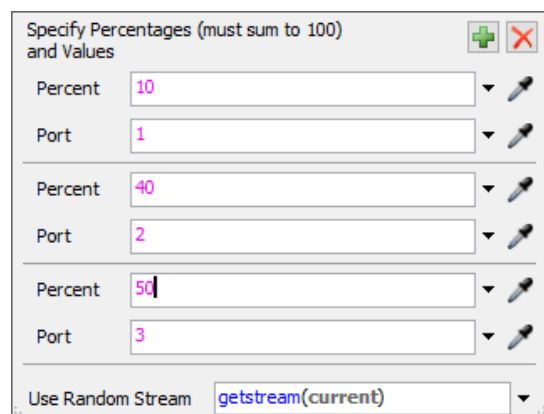


Fig. 4. Percentage distribution to output ports

2.1.3. Round Robin Option

The *Random* → *Round Robin* option in *Send to Port* allows you to assume a specific sequence of output ports. The flow elements go to the output ports in sequence. When three output ports are available, the first element goes to port 1, the second to port 2, the third to port 3 and the fourth again to port 1. After selecting the *Round Robin option if Available* blocked ports will be skipped.

2.1.4. Shortest Queue Option

The *Shortest Queue* option is located in the *Queue Size group*. When selected, flow items will be sent to those objects (buffers, machines, etc.) that have the fewest other flow items (i.e. the smallest queue).

You can also select *Shortest Queue if Available*. It allows to bypass unavailable target objects. It may happen that the object with the shortest queue does not accept any further elements, e.g. because the buffer is full. In this situation the element will be redirected to another queue.

Longest Queue if Available gives the opposite result to the previous ones. Objects with the longest queue are selected first.

3. Flow elements

3.1. Creating flow elements

A flow element is any element subject to manipulation in the model, e.g. a pallet or a box. Flow elements are generated in the *Source object* (Fig.5). In its properties, in the tab of the same name, you can select the flow element used in the model (*Source* → *FlowItem Class*). Details of their configuration will be discussed later in the course.

The preview of all available flow elements (Fig. 5) along with the possibility of their further editing is possible after selecting *FlowItemBin* on the top bar of the program, in the upper right corner.

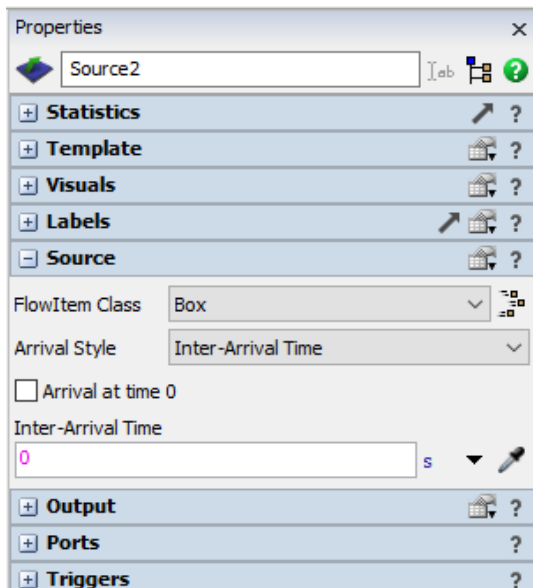


Fig. 4. Selecting the flow element – Box

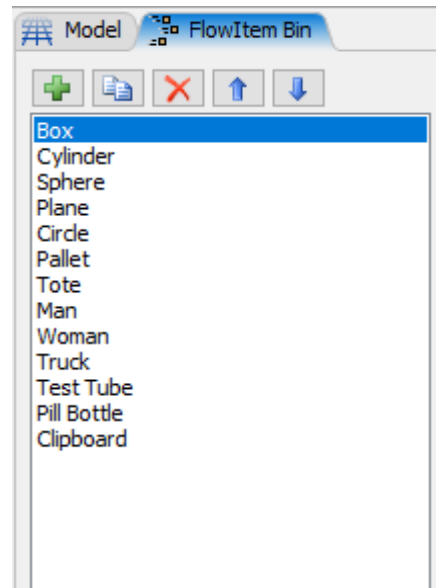


Fig.5 FlowItemBin

3.2. Labels – Labels

Labels added to flow elements are used to control their behavior in the model. They allow you to assign different features to each element, which allows you to initiate model behavior depending on the value of these features. For example, you can assign generated elements labels defining their color or mass, based on which they will be directed to the appropriate storage rack or placed on the appropriate conveyor belt.

The label value can be changed by each object in the model (*Triggers option*), while label names should be added to flow elements at the first stage of model building, i.e. in the *FlowItemBin window*. You should select the object there, and then in *the Labels tab* green cross (fig. 6).

The following types of labels are most commonly used:

- *Label Number* – the label contains numeric values,
- *String Label* – label with text values,
- *Pointer Label* - the label contains a reference to a specific object in the model (its address).

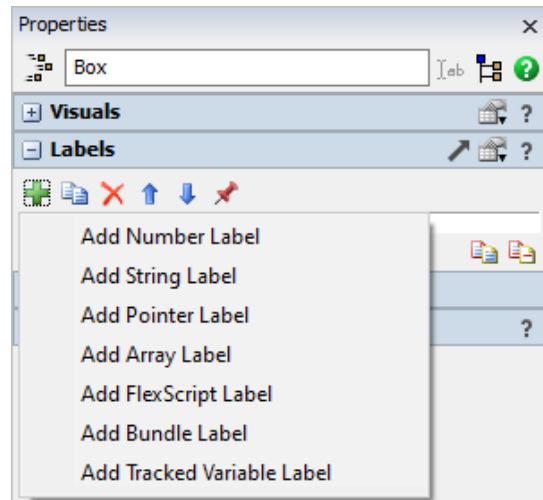


Fig.6 Adding labels

A good practice when creating labels is to use a uniform naming scheme, e.g.: all labels with a capital letter (**Weight**). If the name consists of several words, each of them starts with a capital letter (**TypeProduct**).

In label names:

- do not use spaces,
- no special characters are added (!,@,% , etc.),
- you cannot start characters with a digit.

For the task, two numeric labels named **Weight** and **ProductType** should be added. Their initial value will be 0 (Fig. 7).

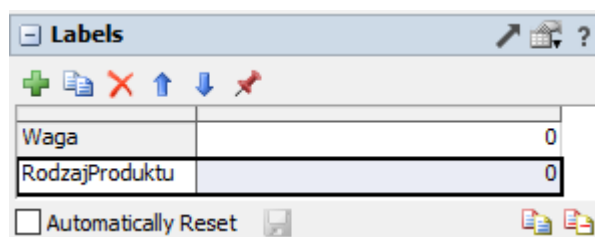


Fig.7 Adding labels

3.3. Giving Value to Labels - Triggers

Each object has its own specific type of triggers that allow for the execution of a specific action when an appropriate event occurs.

In the task, each item generated by *Source* will be assigned a value specifying its type and weight (and color, assigned based on information about the product type).

In the source properties, select *Triggers*, then *On Creation* → *Data* → *Set Label and Color* (Fig. 8). In the window you can assign label values:

- *Object* – specifies what the label will be assigned to; by default it is **item**, i.e. the current flow element,
- *Label* – indicates the name of the label; the default value is "Type", but once you've added labels to flow elements, their names appear in the list to choose from.
- *Value* – specifies the value of the label; by default, the notation `duniform(1,3,getstream(current))` appears, which means a value generated from a discrete uniform distribution on the range from 1 to 3.

In a similar way, the Weight label will be assigned. With the *On Creation* option you should select the green cross and then *Data* → *Set Label*. In this case, only the value will be added, without specifying the color (Fig.9). It is assumed that the product weight will be in the range of 1 - 30 kg.

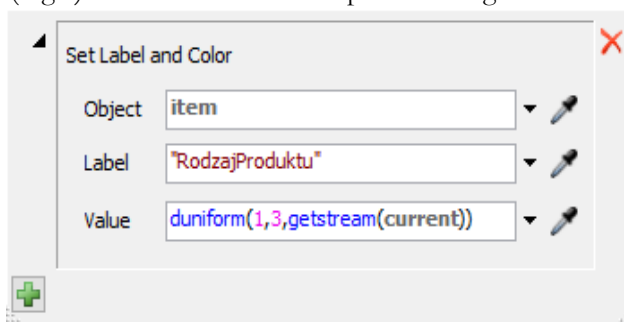


Fig.8 Assigning value - ProductType

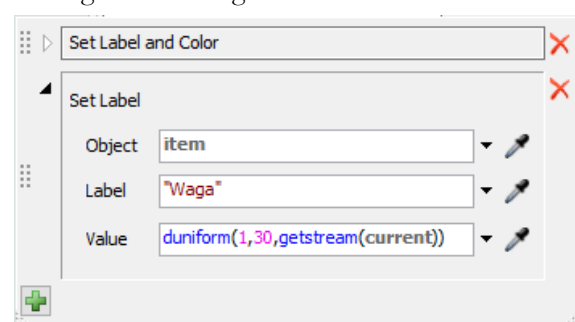


Fig.9. Assigning Value - Weight

The result of the introduced changes can be seen in Fig. 10. Each of the flow elements has a different **ProductType** label value from the range 1 - 3. Additionally, the elements have a different color from the RGB palette, where 1 corresponds to red, 2 green, 3 blue, etc. The elements also have an assigned weight.

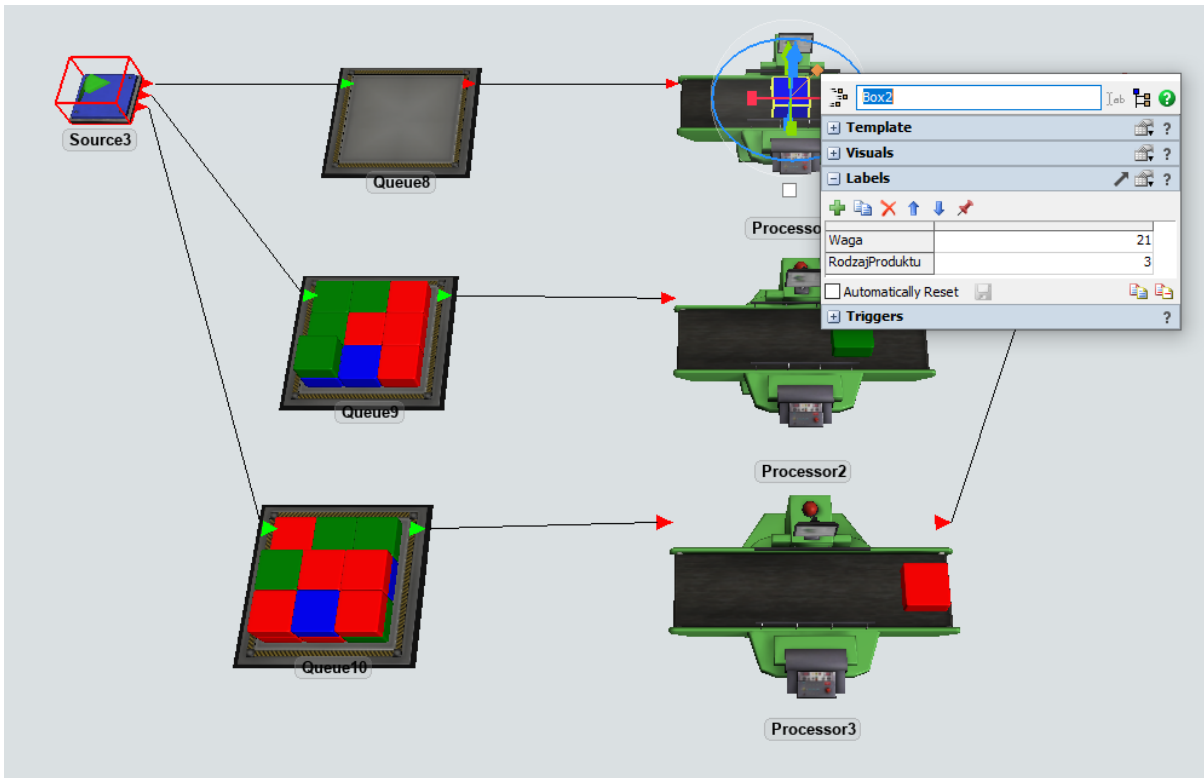


Fig.10. Example of an element with assigned values of the Weight and Product Type labels.

4. Flow logic using labels

4.1. By Expression Option

This option can be used when, for example, products with a number specified in the label are to be sent to buffers before machines assigned to a given item. In the *Send to Port* section, the *By Expression* option allows you to enter a function or select one from a list. It indicates the output port number that the flow element will go to.

Product Type Label is located on the current element **item**. To refer to it, the notation **item.ProductType** is used. In this case, it means a value in the range 1 - 3. Therefore, using this expression, the flow elements with numbers 1 to 3 will be sent to the corresponding output ports with their corresponding numbers. The result is shown in Fig.11.


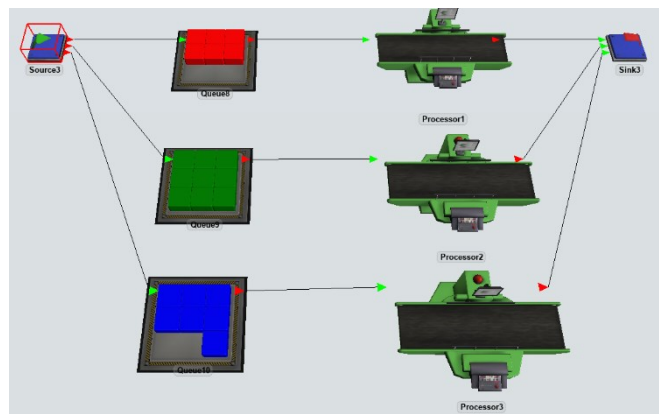


Fig.11 By Expression option

4.2. Conditional Port Option

This option allows you to differentiate the destination port for flow elements depending on the selected label value range. In this example, it is assumed that products are sent to the appropriate ports depending on the **Weight label value** . Products weighing less than or equal to 15 kg are sent to port 1, while the remaining products are sent to port 2. The condition is specified in the *Condition field* . If it is met (*True*), the element will be sent to port 1, otherwise (*False*) to port 2. The notation of this option is shown in Fig. 12.

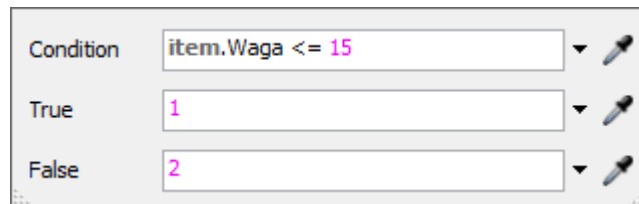


Condition	item.Waga <= 15
True	1
False	2

Conditional Port Option

4.3. Port by Case Option

Port by Case allows you to specify the port number of the appropriate output port depending on the value of the entered expression (Fig. 13). In the *Value field* , you enter the selected expression – the example uses **item.ProductType** . Subsequent cases (*Case*) refer to the individual values of this expression. They are assigned selected output port numbers. New cases are added with a green cross. There is always one default case *Default* . If a conventional port 0 is assigned to it, it means that if an element appears in the model that is not defined by the value of the entered expression (here: without **the ProductType** label), it will go to the first free output port.

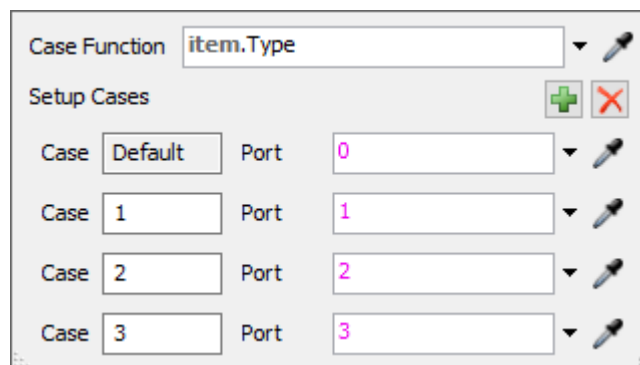


Case Function	item.Type	
Setup Cases	+ -	
Case	Default	Port 0
Case	1	Port 1
Case	2	Port 2
Case	3	Port 3

Fig.13 Port by Case option

4.4. Do Not Release Option Item

Do Not Release Item allows you to block a flow element through a given object. Blocking all elements on an object is achieved by entering the value "-1" in *Send To Port* . If you want to block only selected elements, you should use *the Port by Case option* , where in the case *Default* "-1" is given and for the remaining cases the appropriate ports are assigned. In the modified example (**item.ProductType**) you can e.g. block element 1

by directing elements 2 and 3 to ports (machines) 1 and 2 (Fig. 14). Elements 1 (red) remain on the buffer, elements 2 and 3 (green and blue) go to the appropriate machines (Fig. 15).

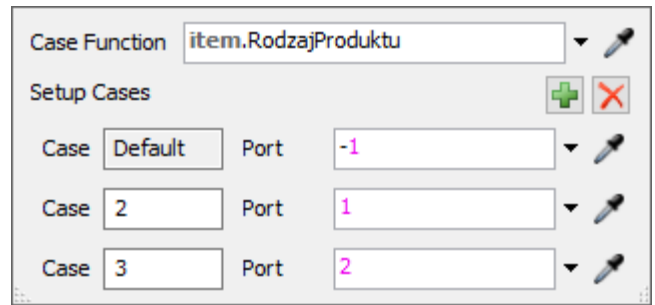

Do Not Release settings Item

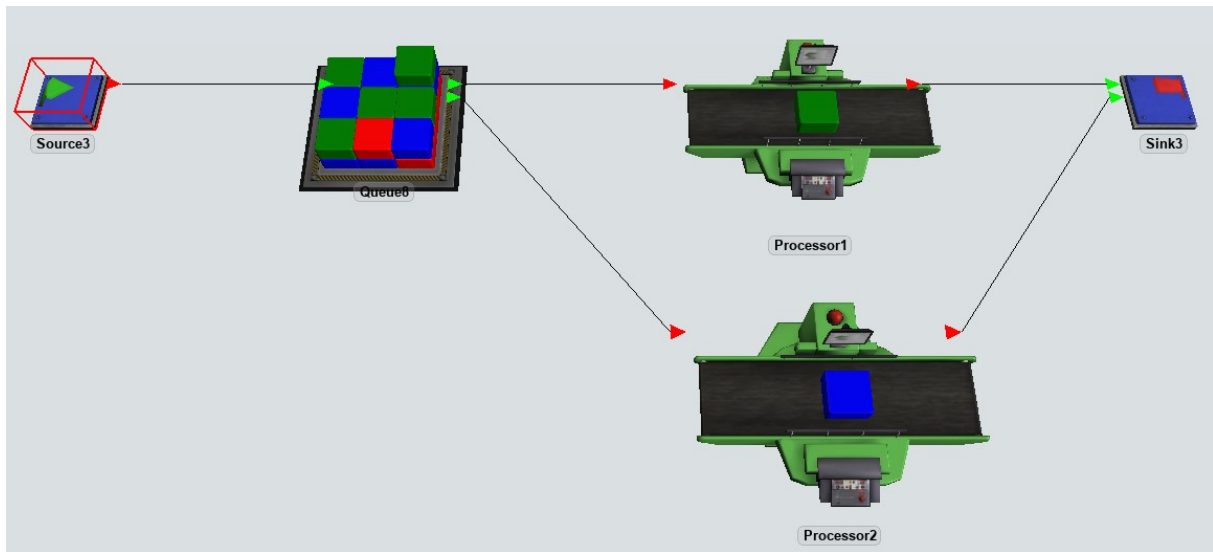


Fig.15. Result of using the *Do Not Release option Item*